

REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	01/20/04	H.N.

F7415

Overview

The Digilab breadboard/wirewrap board (DBB) offers a ready-made solution for creating breadboard or wirewrap circuits as accessories to Digilab system boards. All signals pass directly through the DBB, so it can be inserted between system boards and I/O boards. All signals are also brought to test point and prototyping connectors for convenience.

DBB features include:

- A large 540 tie-point breadboard with separate pre-connected power/GND tracks, or a 540-hole wirewrap area;
- Test point connections on every signal;
- Prototype/wirewrap connections on every signal;
- Compatibility with all Digilab system boards for easy design extension.


Functional Description

The DBB simply extends the A & B and E & F connectors of Digilab system boards. All signals originating from a system board pass directly through the DBB from the connectors on one side of the board to the other. All signals are brought out to both test point and prototyping connectors, so they may easily be accessed. The DBB provides a large breadboard/wirewrap area where accessory


circuits can easily be constructed and attached directly to signals arising from a connected system board. Multiple DBB's can be used to create an even larger breadboard area. The Vdd and GND signals generated by the connected system board are made available to the breadboard area.

Signals and Connector Pinouts

All signals on the DBB are labeled with an "A" or "B", appended with the connector pin number.

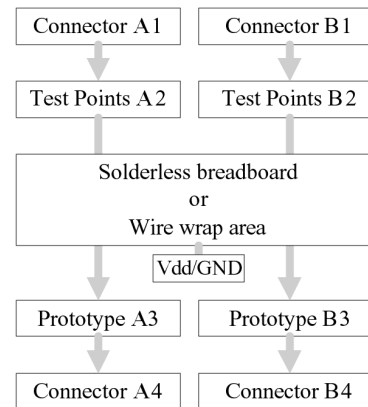

ET-DBB-1 breadboard schematic

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED			
		Emulation Technology, Inc. VLSI and SMT ADAPTERS and ACCESSORIES	
		2344 Walsh Avenue, Bldg F Santa Clara, CA 95051	TEL: (408) 982-0660 FAX: (408) 982-0664
SHEET: 1 OF 3	DATE: 01/20/04	REVISION:	ASSEMBLY DRAWING
CHECKED: Perry Munroe	DRAWN: Huy Nguyen	ITEM: ET-DBB-1	
DO NOT SCALE DRAWING			DESCRIPTION: ET-DBB-1

REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	01/20/04	H.N.

F7415

Connector A1

1	⊗	A1
2	⊗	A2
3	⊗	A3
4	⊗	A4
5	⊗	A5
6	⊗	A6
7	⊗	A7
8	⊗	A8
9	⊗	A9
10	⊗	A10
11	⊗	A11
12	⊗	A12
13	⊗	A13
14	⊗	A14
15	⊗	A15
16	⊗	A16
17	⊗	A17
18	⊗	A18
19	⊗	A19
20	⊗	A20
21	⊗	A21
22	⊗	A22
23	⊗	A23
24	⊗	A24
25	⊗	A25
26	⊗	A26
27	⊗	A27
28	⊗	A28
29	⊗	A29
30	⊗	A30
31	⊗	A31
32	⊗	A32
33	⊗	A33
34	⊗	A34
35	⊗	A35
36	⊗	A36
37	⊗	UDD
38	⊗	A38
39	⊗	GND
40	⊗	UU

A1

Connector A2

1	⊗	A1
2	⊗	A2
3	⊗	A3
4	⊗	A4
5	⊗	A5
6	⊗	A6
7	⊗	A7
8	⊗	A8
9	⊗	A9
10	⊗	A10
11	⊗	A11
12	⊗	A12
13	⊗	A13
14	⊗	A14
15	⊗	A15
16	⊗	A16
17	⊗	A17
18	⊗	A18
19	⊗	A19
20	⊗	A20
21	⊗	A21
22	⊗	A22
23	⊗	A23
24	⊗	A24
25	⊗	A25
26	⊗	A26
27	⊗	A27
28	⊗	A28
29	⊗	A29
30	⊗	A30
31	⊗	A31
32	⊗	A32
33	⊗	A33
34	⊗	A34
35	⊗	A35
36	⊗	A36
37	⊗	UDD
38	⊗	A38
39	⊗	GND
40	⊗	UU

A2

Connector A3

1	⊗	A1
2	⊗	A2
3	⊗	A3
4	⊗	A4
5	⊗	A5
6	⊗	A6
7	⊗	A7
8	⊗	A8
9	⊗	A9
10	⊗	A10
11	⊗	A11
12	⊗	A12
13	⊗	A13
14	⊗	A14
15	⊗	A15
16	⊗	A16
17	⊗	A17
18	⊗	A18
19	⊗	A19
20	⊗	A20
21	⊗	A21
22	⊗	A22
23	⊗	A23
24	⊗	A24
25	⊗	A25
26	⊗	A26
27	⊗	A27
28	⊗	A28
29	⊗	A29
30	⊗	A30
31	⊗	A31
32	⊗	A32
33	⊗	A33
34	⊗	A34
35	⊗	A35
36	⊗	A36
37	⊗	UDD
38	⊗	A38
39	⊗	GND
40	⊗	UU

A3

Connector A4

1	⊗	A2
2	⊗	A1
3	⊗	A4
4	⊗	A3
5	⊗	A6
6	⊗	A5
7	⊗	A8
8	⊗	A7
9	⊗	A10
10	⊗	A9
11	⊗	A12
12	⊗	A11
13	⊗	A14
14	⊗	A13
15	⊗	A16
16	⊗	A15
17	⊗	A18
18	⊗	A17
19	⊗	A20
20	⊗	A19
21	⊗	A22
22	⊗	A21
23	⊗	A24
24	⊗	A23
25	⊗	A25
26	⊗	A26
27	⊗	A28
28	⊗	A27
29	⊗	A30
30	⊗	A29
31	⊗	A32
32	⊗	A31
33	⊗	A34
34	⊗	A33
35	⊗	A36
36	⊗	A35
37	⊗	A38
38	⊗	UDD
39	⊗	UU
40	⊗	GND

A4

Connector B1

1	⊗	B1
2	⊗	B2
3	⊗	B3
4	⊗	B4
5	⊗	B5
6	⊗	B6
7	⊗	B7
8	⊗	B8
9	⊗	B9
10	⊗	B10
11	⊗	B11
12	⊗	B12
13	⊗	B13
14	⊗	B14
15	⊗	B15
16	⊗	B16
17	⊗	B17
18	⊗	B18
19	⊗	B19
20	⊗	B20
21	⊗	B21
22	⊗	B22
23	⊗	B23
24	⊗	B24
25	⊗	B25
26	⊗	B26
27	⊗	B27
28	⊗	B28
29	⊗	B29
30	⊗	B30
31	⊗	B31
32	⊗	B32
33	⊗	B33
34	⊗	B34
35	⊗	B35
36	⊗	B36
37	⊗	UDD
38	⊗	B38
39	⊗	GND
40	⊗	UU

B1

Connector B2

1	⊗	B1
2	⊗	B2
3	⊗	B3
4	⊗	B4
5	⊗	B5
6	⊗	B6
7	⊗	B7
8	⊗	B8
9	⊗	B9
10	⊗	B10
11	⊗	B11
12	⊗	B12
13	⊗	B13
14	⊗	B14
15	⊗	B15
16	⊗	B16
17	⊗	B17
18	⊗	B18
19	⊗	B19
20	⊗	B20
21	⊗	B21
22	⊗	B22
23	⊗	B23
24	⊗	B24
25	⊗	B25
26	⊗	B26
27	⊗	B27
28	⊗	B28
29	⊗	B29
30	⊗	B30
31	⊗	B31
32	⊗	B32
33	⊗	B33
34	⊗	B34
35	⊗	B35
36	⊗	B36
37	⊗	UDD
38	⊗	B38
39	⊗	GND
40	⊗	UU

B2

Connector B3

1	⊗	B1
2	⊗	B2
3	⊗	B3
4	⊗	B4
5	⊗	B5
6	⊗	B6
7	⊗	B7
8	⊗	B8
9	⊗	B9
10	⊗	B10
11	⊗	B11
12	⊗	B12
13	⊗	B13
14	⊗	B14
15	⊗	B15
16	⊗	B16
17	⊗	B17
18	⊗	B18
19	⊗	B19
20	⊗	B20
21	⊗	B21
22	⊗	B22
23	⊗	B23
24	⊗	B24
25	⊗	B25
26	⊗	B26
27	⊗	B27
28	⊗	B28
29	⊗	B29
30	⊗	B30
31	⊗	B31
32	⊗	B32
33	⊗	B33
34	⊗	B34
35	⊗	B35
36	⊗	B36
37	⊗	UDD
38	⊗	B38
39	⊗	GND
40	⊗	UU

B3

Connector B4

1	⊗	B2
2	⊗	B1
3	⊗	B4
4	⊗	B3
5	⊗	B6
6	⊗	B5
7	⊗	B8
8	⊗	B7
9	⊗	B10
10	⊗	B9
11	⊗	B12
12	⊗	B11
13	⊗	B14
14	⊗	B13
15	⊗	B16
16	⊗	B15
17	⊗	B18
18	⊗	B17
19	⊗	B20
20	⊗	B19
21	⊗	B22
22	⊗	B21
23	⊗	B24
24	⊗	B23
25	⊗	B26
26	⊗	B25
27	⊗	B28
28	⊗	B27
29	⊗	B30
30	⊗	B29
31	⊗	B32
32	⊗	B31
33	⊗	B34
34	⊗	B33
35	⊗	B36
36	⊗	B35
37	⊗	B38
38	⊗	UDD
39	⊗	UU
40	⊗	GND


B4



Solderless
Breacboard

BB1

ETC-501



J9

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED



Emulation Technology, Inc.

VLSI and SMT ADAPTERS and ACCESSORIES

2344 Walsh Avenue, Bldg F
Santa Clara, CA 95051


TEL: (408) 982-0660
FAX: (408) 982-0664

SHEET: 2 OF 3	DATE: 01/20/04	REVISION:	ASSEMBLY DRAWING
CHECKED: Perry Munroe	DRAWN: Huy Nguyen	ITEM: ET-DBB-1	
DO NOT SCALE DRAWING			DESCRIPTION: ET-DBB-1

F7415

REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	01/20/04	H.N.

Breadboard 1

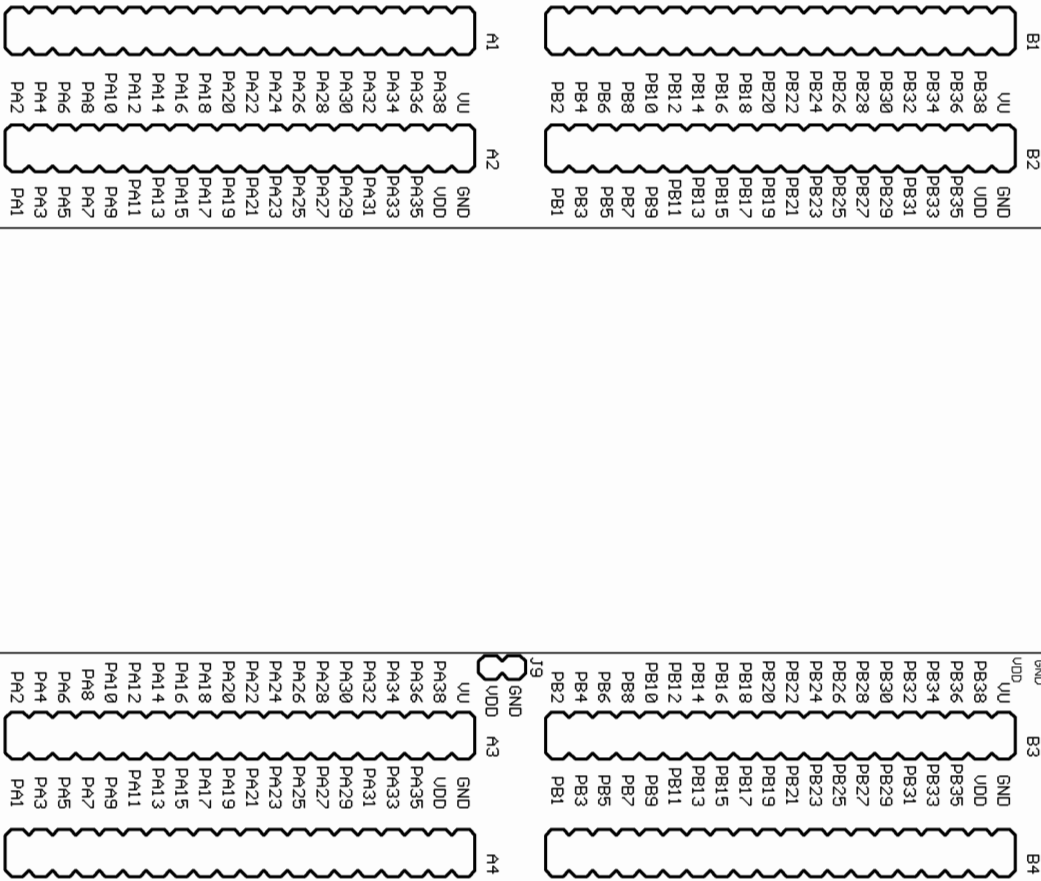

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED



Emulation Technology, Inc.

VLSI and SMT ADAPTERS and ACCESSORIES

2344 Walsh Avenue, Bldg F
Santa Clara, CA 95051

TEL: (408) 982-0660
FAX: (408) 982-0664

SHEET: 3 OF 3	DATE: 01/20/04	REVISION:	ASSEMBLY DRAWING
CHECKED: Perry Munroe	DRAWN: Huy Nguyen	ITEM: ET-DBB-1	
DO NOT SCALE DRAWING			DESCRIPTION: ET-DBB-1